


C/ Narcis Monturiol, 1 Bis - Nave 5 08750 – Molins de Rei (Barcelona) Tel. +34 93 685 61 95 sagati@sagati.com



Copper wires are highly recommended as a high-performance wire when cutting speed and accuracy are required.

Composition	Characteristics	Sagati "X" wire	Sagati "TEX" wire	
CuZn	Core	Copper	Copper	
	Coating	CuZn	CuZn	
	Tensile strength	520/mm2	450N/mm2	
	Elongation	1%	1%	
	Conductibility	80% IACS	70% IACS	

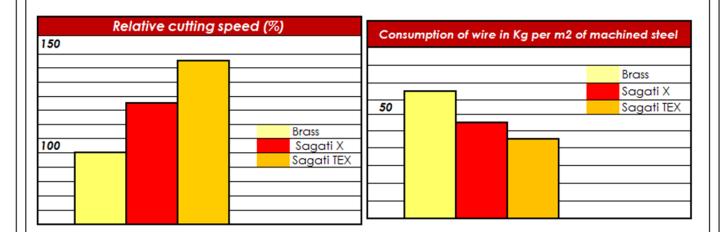

	Spool kilograms							
Diameter		K160	K200	K250	K355	P5	P10	P15
0,25mm	4	8	16	25	45	5	10	20
0,30mm	4	8	16	25	45	5	10	20